

Aquitron

AT-PROBE-TS/M

Water Detection Probe



DATA SHEET



aquilar
leak detection solutions




AT-PROBE-TS/M

Water Detection Probe

The AquiTron water detection probe has been designed for use with any of the TraceTek, AquiTron and Eco-Leak leak alarm panels and is fully compatible with all TT1000 system components. The use of detection probes allows the monitoring for leaks in areas where sensing cables would be difficult to install, either because of the harsh operating environment in which detection is required, or the impracticality of installing lengths of sensor cable in vulnerable areas.


APPLICATIONS

The probe has been designed for seamless integration into TraceTek, AquiTron and EcoLeak water detection systems, either with or without sensor cable, to provide a truly versatile sensor system. For distributed applications, up to 100 probes may be interconnected by a single jumper cable (daisy chain) and monitored for leak location utilising either a TTDM-128, TS-12 or TTSIM-1 / 1A / 2 alarm and locating modules providing leak location in either metres, feet or zones. The AT-SZA and AT-MZA panels provide a single or multi zone indication, capable of monitoring up to ten probes per zone.

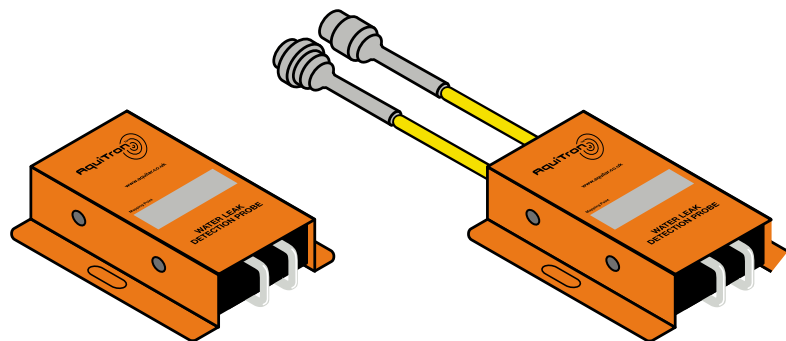

TECHNICAL INFORMATION

Dimensions	120 L x 96 W x 29mm H
Shroud	Epoxy coated aluminium, high visibility vibrant orange RAL 2008
Probe	363 stainless steel
Probe Depth	Fixed @ 1-2mm when placed flat. Can be wall mounted to any depth required

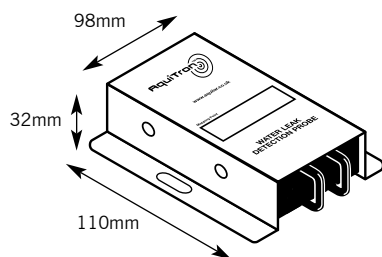

Housing	Black PVC
Connections	TS Version - Terminal strips M Version - Modular , 100mm leads with TraceTek connectors
Resetting	Allow probe to dry completely and probe can be re-used. Probes are not suitable for permanent submersion.

ORDERING INFORMATION

Catalogue number	3500 AT-PROBE-TS, Terminal strips 3510 AT-PROBE-M, Modular two wire
-------------------------	--

INSTALLATION INFORMATION

Floor or Tray Mount: The Probe unit has been designed with a much lower profile than other probe type detectors, suited for either screw or adhesive attachment. The vibrant orange appearance provides ease of location in low light or where equipment and wiring is dense.

Wall Mount: The Probe fits close to the wall extending only 29mm.

**Potted version available on special order for areas subject to frequent submersion.

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Aquilar Limited makes no warranty as to the accuracy or completeness of the information, and disclaims any liability regarding its use. The only obligations of Aquilar Limited are those in the Aquilar Standard Terms and Conditions of Sale for this product, and in no case will Aquilar Limited be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Aquilar Limited reserves the right to make changes - without notification to Buyer - to processing or materials that do not affect compliance with any applicable specification.

*AquiTron is a trademark of AquiTron Limited
Aquilar is a trademark of Aquilar Limited*