

FIST™ Splice Sub-assembly kit for GCO2-FC/FD flat closures with 4 slim High Density (HD) element trays, each for holding up to 24 primary coated fibers, with Heat Shrink type splice holder

- Splice sub-assemblies consists of a wraparound groove plate holding the included splice organizer trays
- Groove plates are designed with slots for routing fiber to and from the organizer trays
- Loop-back facility allowing for single circuit uncut looped fiber storage on the splice tray
- Compatible with G652.D optical fiber

Product Classification

Product Type	Fiber splice tray
Product Series	FIST-SOSA2
Regional Availability	EMEA
Product Brand	FIST™


General Specifications

Application	For use with FIST-GCO2 flat fiber closures
Color	Gray
Fiber Storage Length, maximum	1000 mm for 250 µm fibers
Fiber Storage Length, minimum	750.00 mm 29.53 in
Package, quantity	1
Packaging Type	Bag Carton
Splice Protector Diameter, maximum	2.80 mm 0.11 in
Splice Protector Diameter, minimum	2.20 mm 0.09 in
Splice Protector Length, maximum	45.00 mm 1.77 in
Splice Protector Length, minimum	30.00 mm 1.18 in
Splice Tray Chip Type	Heat shrink
Splice Tray Construction	SHD (for up to 24 primary coated fibers)
Splice Tray Included, quantity	4
Splices per Tray, note	24 splices (250µm) per tray
Splices per Tray, quantity	24
Used UMS Units, quantity	1

Dimensions

Height	4.00 mm 0.16 in
Length	208.00 mm 8.19 in
Weight	0.14 kg 0.31 lb
Width	106.00 mm 4.17 in

Dimension Drawing

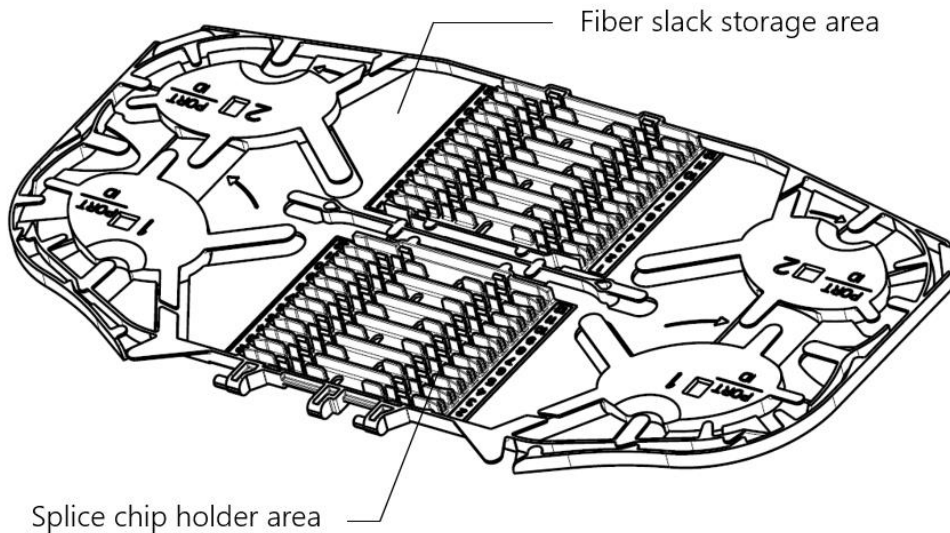

Dimension Drawing

Used as an image placeholder

Mechanical Specifications

Material Type	PC/ABS
Minimum Bend Radius, standard	20.00 mm 0.79 in

Environmental Specifications

Environmental Space	Indoor Outdoor
Relative Humidity	93%, non-condensing
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Regulatory Compliance/Certifications

Agency
RoHS 2011/65/EU

Classification
Compliant



* Footnotes

Used UMS Units, quantity The overall used splice tray height is expressed in UMS units. One UMS unit equals 6 mm.